

PRODUCT PROFILE



finder[®]

SWITCH TO THE FUTURE

- Automation
- Industrial applications
- Residential and Commercial




finder®

SWITCH TO THE FUTURE



COMPETENCE

People are at the heart of Finder's company values

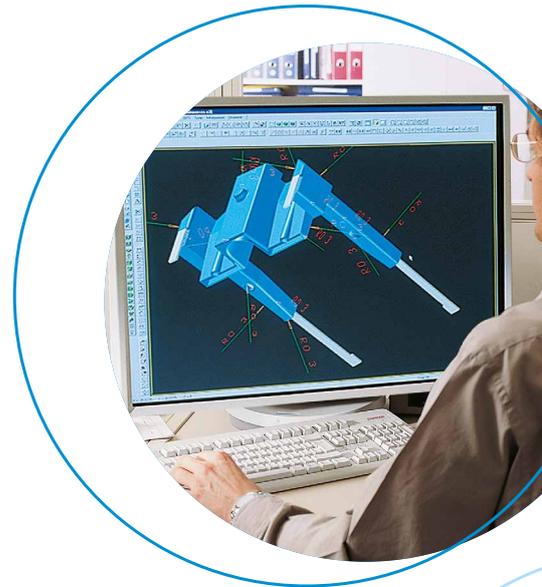

Finder has the widest range of quality approvals of any relay manufacturer.


Our four factories produce relays manufactured on assembly lines designed and built at our headquarters by a team of experts in the design of industrial automation systems.

Finder makes over 12,500 different types of products and has one of the widest offerings available today, specializing in step relays; light dependent relays; industrial relays; miniature relays; relay interface modules; power relays; timers; sockets and accessories.





12,500 different types of products

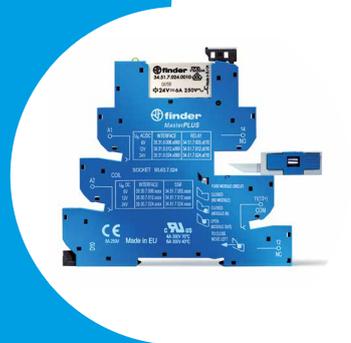



finder[®]
SWITCH TO THE FUTURE

PRODUCTS



for every type of application

	Features	Rated current	No. of contacts	Sockets
	30 Series - Subminiature DIL relays <ul style="list-style-type: none"> - 2 Pole changeover contacts - Low level switching capability - Subminiature: - industry standard DIL package - Sensitive DC coil: 200 mW - Wash tight: RT III 	2 A	2 CO	
	32 Series - Subminiature PCB relays <ul style="list-style-type: none"> - 1 Pole changeover contacts or 1 Pole normally open contact - Subminiature, low profile package - Sensitive DC coil: 200 mW - Wash tight: RT III 	6 A	1 CO 1 NO	
	34 Series - Ultra-slim Electromechanical PCB relays <ul style="list-style-type: none"> - Sensitive DC coil: 170 mW - 5 mm wide - 6 kV (1.2/50 μs) isolation, coil - contacts 	6 A	1 CO 1 NO	93 Series 
	34 Series - Ultra-slim Solid State PCB relays <ul style="list-style-type: none"> - Sensitive DC input circuits - 5 mm wide - Silent, high speed switching with long electrical life 	0.1 A 2 A	1 output (SSR)	
	36 Series - Miniature PCB relays <ul style="list-style-type: none"> - 1 Pole changeover contacts - Miniature "Sugar Cube" package - Sensitive DC - 360 mW - Wash tight: RT III 	10 A	1 CO	
	40 Series - Miniature PCB/plug-in relays <ul style="list-style-type: none"> - DC coils (standard or sensitive), 500 or 650 mW & AC coils - 5.3 mm pin pitch - 8 mm, 6 kV (1.2/50 μs) isolation, coil - contacts 	10 A 16 A	1 CO 1 NO	95 Series 
	40 Series - Miniature PCB relays <ul style="list-style-type: none"> - DC coils, 500 or 650 mW - 3.5 mm or 5.3 mm pin pitch - 8 mm, 6 kV (1.2/50 μs) isolation, coil - contacts - Flux proof: RT II standard 	12 A 16 A	1 CO 1 NO	
	41 Series - Low profile electromechanical PCB relays <ul style="list-style-type: none"> - Low profile, 15.7 mm height - DC coils: 400 mW - 8 mm, 6 kV (1.2/50 μs) isolation, coil - contacts - Flux proof: RT II standard, (RT III option) 	12 A 16 A 8 A	1 CO 1 NO 2 CO	93 Series 
	41 Series - Low profile Solid State PCB relays <ul style="list-style-type: none"> - Low profile, 15.7 mm height - Sensitive DC input circuits - Silent, high speed switching with long electrical life 	3 A 5 A	1 output (SSR)	95 Series 
	43 Series - Low profile PCB relays <ul style="list-style-type: none"> - Low profile, 15.4 mm height - Sensitive DC coils: 250 mW or 400 mW - Very high coil contact isolation 10 mm, 6 kV (1.2/50 μs) - Flux proof: RT II standard, (RT III option) - 3.2 or 5 mm pin pitch 	10 A 16 A	1 CO 1 NO	95 Series 
	44 Series - Miniature PCB relays <ul style="list-style-type: none"> - DC coils (standard or sensitive), 500 or 650 mW - High physical separation between adjacent contacts - 8 mm, 6 kV (1.2/50 μs) isolation, coil - contacts - Flux proof: RT II - 5 mm pin pitch 	6 A 10 A	2 CO	95 Series 

	Features	Rated current	No. of contacts	Sockets
	45 Series - Miniature PCB relays <ul style="list-style-type: none"> - Sensitive DC coil - 360 mW - Relay for +125 °C ambient use - Contact gap ≥ 3 mm according to EN 60730-1 - 8 mm, 6 kV (1.2/50 μs) isolation, coil - contacts - PCB mounting + Faston 250 	16 A	1 NO 1 NC	
	46 Series - Miniature industrial relays <ul style="list-style-type: none"> - DC coils, 500 mW or AC coils, 1.2 VA - Socket mount or direct connection via Faston connectors - Available with lockable test button, mechanical flag & LED indicator - 8 mm, 6 kV (1.2/50 μs) isolation, coil - contacts - Version for Railway Application 	16 A 8 A	1 CO 2 CO	97 Series 
	55 Series - General purpose relays <ul style="list-style-type: none"> - AC & DC coils - PCB or Plug-in mounting - Available with lockable test button, mechanical flag & LED indicator - Version for Railway Application - ATEX compliant (Ex nC) option available 	10 A 7 A	2 CO 3 CO 4 CO	94 Series 
	56 Series - Miniature power relays <ul style="list-style-type: none"> - AC & DC coils - PCB or Plug-in mounting - Flange mount option (Faston 187 termination) - Available with lockable test button, mechanical flag & LED indicator - Version for Railway Application 	12 A	2 CO 2 NO 4 CO 4 NO	96 Series 
	60 Series - General purpose relays <ul style="list-style-type: none"> - AC & DC coils, including "current sensing" versions - 8 & 11 pin plug-in - Flange mount - Available with lockable test button, mechanical flag & LED indicator - Version with bifurcated contacts for low level switching 	6 A 10 A	2 CO 3 CO	90 Series 
	62 Series - Power relays <ul style="list-style-type: none"> - AC & DC coils - PCB mount or Plug-in mount (Faston 187) or Flange mount (Faston 250) - NO contacts options, > 3 mm contact gap - LED, mechanical indicator & test button options - Version with magnetic blow 	16 A	2 CO 2 NO 3 CO 3 NO	92 Series 
	65 Series - Power relays <ul style="list-style-type: none"> - AC & DC coils - PCB mount or Flange mount (Faston 250) - NO version, > 3 mm contact gap 	20 A 30 A	1 NO + 1 NC 1 NO	
	66 Series - Power relays <ul style="list-style-type: none"> - AC & DC coils - PCB mount or Flange mount (Faston 250) - 8 mm, 6 kV (1.2/50 μs) isolation, coil - contacts - ATEX compliant (Ex nC) option available 	30 A	2 CO 2 NO	
	67 Series - Solar relays <ul style="list-style-type: none"> - DC coils, with only 170 mW holding power - Contact gap ≥ 3 mm (according to VDE 0126-1-1, EN 62109-1, EN 62109-2) - Reinforced insulation between coil and contacts - 1.5 mm gap between PCB and relay base - Suitable for use at ambient temperatures up to 85 °C (with energy-saving coil energization) or 70 °C (with standard coil energization) 	50 A	2 NO 3 NO	
	RB Series - Bistable relays <ul style="list-style-type: none"> - DC voltage - 2 coil type - SET and RESET signals - 35 mm rail (EN 60715) mount - Pin socket type 90.21 mount 	8 A	2 CO 4 CO	90 Series 
	RR Series - Fast relay module <ul style="list-style-type: none"> - DC voltage - Operate time ≤ 3 ms - LED command status indication - 35 mm rail (EN 60715) mount - Pin socket type 90.21 mount 	8 A	4 CO 3 NO + 1 CO	90 Series 

Features



38 Series - Relay interface modules

- DC, AC or AC/DC coil versions
- 6.2 mm or 14 mm wide
- Special coil / input leakage current suppression types
- Screw & screwless terminals

Rated current	No. of contacts
6 A	1 CO
16 A	1 CO
8 A	2 CO
0.1 A	1 SSR
2 A	1 SSR
3 A/5 A	1 SSR



39 Series - MasterINTERFACE - Relay interface modules

- DC, AC or AC/DC coil versions
- 6.2 mm wide
- Electromechanical relays (EMR) or solid state relays (SSR)
- **MasterBASIC** for general use in any type of system available ATEX compliant version
- **MasterPLUS** accepts the output fuse module, for the easy and space efficient protection of output circuits
- **MasterINPUT** and **MasterOUTPUT** for the quick and easy distribution of supply voltage to proximity switches, electromagnetic valves
- **MasterTIMER** slim and multifunction timed interface modules with EMR and SSR, 8 functions, 4 time scales
- Push-in and screw terminals

6 A	1 CO
0.1 A	1 SSR
2 A	1 SSR



48 Series - Relay interface modules

- AC or DC coils
- 15.8 mm wide
- Instant ejection of relay using plastic retaining clip
- Supply status indication and EMC coil suppression module as standard
- Push-in and screw terminals
- Version with forcibly guided contacts


10 A	1 CO
16 A	1 CO
10 A	2 CO
8 A	2 CO



4C Series - Relay interface modules

- AC or DC coils
- 15.8 mm wide
- Instant ejection of relay using plastic retaining clip
- Supply status indication and EMC coil suppression module as standard
- Push-in and screw terminals
- Mechanical indicator & test button

10 A	1 CO
16 A	1 CO
8 A	2 CO



58 Series - Relay interface modules

- AC or DC coils
- 27 mm wide
- Instant ejection of relay using plastic retaining clip
- Supply status indication and EMC coil suppression module as standard
- Push-in and screw terminals
- Mechanical indicator & test button
- Version ATEX Compliant

10 A	2 CO
	3 CO
7 A	4 CO



19 Series - Override modules

- Clear indication of the signal or equipment status
- Easy to operate selection switches and potentiometers
- Feedback contact; signals when switch is not in "Auto" position
- KNX switching actuator, 6 output
- Compact housing: 3 widths, 11.2, 17.5 or 35 mm

- Auto/Off/On output module, 11.2 mm
- Override module, Auto/Off/Hand (On)
- Override module, Auto/Off/Low/High
- Analogue override module (0...10) V
- Power relay module



Features

99 Series - Coil indication and EMC suppression modules

- Depending on module selected, they can provide;
 - Suppression of coil back emf on switch-off
 - LED indication to show when the coil is energized
 - Protection against reverse polarity applied across the coil terminals
 - By-pass of troublesome leakage currents in the coil circuit

Rated current

No. of contacts

Sockets

—

—



Features

50 Series - Safety relays (EN 50205)

- DC coil, 700 mW
- PCB Relay with forcibly guided contacts according to EN 50205 type B
- High physical separation between adjacent contacts
- 8 mm, 6 kV (1.2/50 μ s) isolation, coil - contacts
- Flux proof: RT II

Rated current

No. of contacts

8 A

1 NO + 1 NC
2 CO



7S Series - Relay modules with forcibly guided contacts

- AC or DC coils
- Extended operating range (0.7...1.25)U_N
- For safety applications, with class A forcibly guided contacts (EN 50205)
- For railway applications; materials compliant with fire and smoke characteristics (UNI 11170-3); mechanical and climatic characteristics compliant with EN 61373 and EN 50155
- SIL 2 compliant according to IEC 61508
- Coil status visual indication with LED
- 35 mm rail (EN 60715) mount

6 A

1 NO + 1 NC
2 NO + 2 NC
3 NO + 1 NC
4 NO + 2 NC



Features

77 Series - Modular Solid State Relays (SSR)

- Input AC or DC
- 230 V AC or 400 V AC output
- Rated voltage range (19...305)V AC or (48...480)V AC
- Zero-crossing and random switch-on versions
- Suitable for lamp loads
- Version available with DC output
- 17.5 and 22.5 mm housing

Rated current

No. of contacts

5 A
15 A
30 A

1 SSR



77 Series - "Hockey puck" Solid State Relays

- Input AC or DC
- 230 V AC or 400 V AC output
- Switching voltage range (19...305)V AC or (48...480)V AC
- Suggested applications: heater control
- Mounting to heatsink with screws
- Zero-crossing version available

25 A
40 A
50 A

1 SSR

Features*	Rated current	Function
 <p>70 Series - Line monitoring relays</p> <ul style="list-style-type: none"> - 1 or 3 phase systems - 1 or 2 contacts - Adjustable or Fixed values - Positive safety logic - Colored LEDs for clear & immediate visual indication - Modular housing, 17.5, 22.5 or 35 mm wide 	<p>6 A 8 A 10 A</p>	<p>Voltage monitoring</p> <ul style="list-style-type: none"> • Undervoltage/Overvoltage • Window mode (overvoltage + undervoltage) • Phase loss • Phase rotation • Asymmetry • Neutral loss
 <p>71 Series - Monitoring relays</p> <ul style="list-style-type: none"> - 1 or 3 phase systems - 1 NO, 1 or 2 contacts - Adjustable or Fixed values - Positive safety logic - LED status indication - 35 or 22.5 mm wide 	<p>10 A</p>	<p>Voltage monitoring</p> <ul style="list-style-type: none"> • Undervoltage/Overvoltage • Phase loss • Phase rotation • Asymmetry <p>Voltage current detecting</p> <p>Thermistor temperature sensing</p>
 <p>72 Series - Monitoring relays</p> <ul style="list-style-type: none"> - Sensitivity adjustable 450 kΩ or fixed 150 kΩ - Electrode and Electrode holder - Delay time (0.5 s or 7 s) or fixed (1 s) - 1 contact, 35 mm wide 	<p>16 A</p>	<p>Level control (Emptying or Filling)</p>
 <p>72 Series - Priority change relay</p> <ul style="list-style-type: none"> - 2 independent NO outputs, relay for alternating loads 12 A - 4 functions - 2 independent control signals - Modular housing, 35 mm wide 	<p>12 A</p>	<p>Special relay for alternating loads; for applications with pumps, compressors, air conditioning or refrigeration units</p>
 <p>72 Series - Float switches</p> <ul style="list-style-type: none"> - Suitable for emptying and filling - 1 CO, 20 A/250 V AC (cos φ = 1) - Cable length 5 m, 10 m or 20 m - H07 RN F cable approved TÜV - Cable and plastic ACS certified available version 	<p>20 A</p>	<p>Float switches suitable for level regulation in grey or black water systems, drainage plants and pump systems</p>
 <p>7E Series - kWh Energy meters</p> <ul style="list-style-type: none"> - 1-phase or 3-phase - LC-Display or Mechanical Display - Single or Double tariff - Output for remote energy management: SO, M-Bus and Modbus - MID compliant version - 17.5, 35 or 70 mm wide 	<p>—</p>	<p>Contatori di energia meccanici e digitali</p>
 <p>6P Series - Surge protection devices (SPD)</p> <ul style="list-style-type: none"> - Type 2 surge arresters for AC system - Type 2 surge arrester for PV system - Replaceable varistor and GDT module with colour code - Visual fault signalling: Healthy/Replace - Remote status signalling contact 	<p>—</p>	<p>Surge arresters suitable for 230 V or 400 V system / applications and PV system</p>

* All products are for 35 mm rail (EN 60715) mounting, except for the float switches.



Features

78 Series - Switch mode power supplies

- 12, 36, 50, 60, 120, 130, 240 W output
- Input (88 ... 265)V AC or (90...275)V DC
- Class A and Class B according EN 55022
- Input protection: replaceable fuse plus spare
- Overvoltage protection: varistor
- From 17.5 to 70 mm wide
- Thermal protection
- Feedback contact versions available

Rated current

Function

- **DC Power supplies**
Output voltage 12 or 24 V DC



Features

7T Series - Panel thermostats

- Small, compact size (17.5 mm wide)
- Snap action themostatic Bimetal sensor
- Wide temperature setting range
- Long electrical life

Rated current

Function

- 10 A**
- **Heating control**
Ventilation control



7F Series - Filter fans

- Very low acoustic noise
- Air volume (24...630)m³/h (free flow)
- Power consumption: (4...130)W
- Operating voltage: 120 or 230 V AC (50/60 Hz) or 24 V DC
- Further available versions: EMC Filter Fan and EMC Exhaust Filter

- **Filter fans for electrical cabinets and enclosures**
Exhaust filters



7H Series - Panel heaters

- Heating power 25 - 50 - 100 or 150 W
- Nominal voltage 110...230 V AC/DC
- PTC self-regulating heating system
- Aluminium profile encased in a plastic housing
- Clip for 35 mm rail (EN 60715) mount

- **Panel heaters for cabinets and switchboards**

Features*	Rated current	Function	Sockets
	<p>1 A SSR* 6 A 8 A 16 A</p>	<p>Multi-function or Mono-function timers</p>	
<p>80 Series - Modular timers</p> <ul style="list-style-type: none"> - Six time ranges from 0.1 s to 24 h - Nominal voltage (12...240)V AC/DC - Contact rated current: 6, 8 or 16 A - Solid state output (SSR): 1 A - 17.5 mm wide 			
	<p>16 A</p>	<p>Multi-function and multi-voltage timers</p>	
<p>81 Series - Modular timers</p> <ul style="list-style-type: none"> - Six time ranges from 0.1 s to 10 h - Seven functions (4 with supply start and 3 with signal start with Reset function) - Nominal voltage (12...230)V AC/DC - Reset function - 17.5 mm wide 			
	<p>8 A 10 A 16 A</p>	<p>Multi-function or Mono-function timers</p>	
<p>83 Series - Modular timers</p> <ul style="list-style-type: none"> - Eight time ranges from 0.05 s to 10 days - Nominal voltage (24...240)V AC/DC - Special version: 2 timed contacts or 1 timed + 1 instantaneous contact - External time setting potentiometer - option pause function option - 22.5 mm wide 			
	<p>16 A</p>	<p>Multi-function SMARTimer</p>	
<p>84 Series - SMARTimer</p> <ul style="list-style-type: none"> - Two supply version available: 12...24 V AC/DC and 110...240 V AC/DC (not polarized) - Two programming modes: "Smart" mode via smartphone with NFC communication or "Classic" mode via the joystick - Flexibility: possible to create new specific functions, mixing the 25 available functions on each channel - High precision and possibility of choice in time set-up: time units; 0.1 seconds, seconds, minutes, hours - Two independent programmable channels 			
	<p>7 A 10 A</p>	<p>Multi-function timers</p>	<p>94 Series</p>
<p>85 Series - Miniature plug-in timers</p> <ul style="list-style-type: none"> - Seven time ranges from 0.05 s to 100 h - AC/DC supply non polarized - 2, 3 or 4 pole 			
	<p>—</p>	<p>Multi-function or Bi-function timers</p>	<p>9x Series</p>
<p>86 Series - Timer modules</p> <ul style="list-style-type: none"> - Time ranges from 0.05 s to 100 h - Wide supply range in AC or DC coils - Plug-in for use with 90.02, 90.03, 92.03, 94.02, 94.03, 94.04, 94.54, 95.03, 95.05, 95.55, 96.02, 96.04, 97.01, 97.02, 97.51 and 97.52 sockets 			
	<p>8 A</p>	<p>Timers • Front panel mount • Socket mount</p>	<p>90 Series</p>
<p>88 Series - Plug-in/Front of panel mount timers</p> <ul style="list-style-type: none"> - 14 time ranges, 0.05 s...100 h - Multi-function - Nominal voltage (24...230)V AC/DC - Version available with 2 timed contacts or 1 instantaneous + 1 timed 			
	<p>2 A 6 A</p>	<p>Multifunction timed interface module, 6.2 mm wide</p>	
<p>93 Series - Ultra-slim timed sockets for 34 series</p> <ul style="list-style-type: none"> - 4 time ranges from 0.1 s to 6 h - 8 functions - 12 or 24 V AC/DC supply - EMR and SSR relays - Screw and push-in terminal 			

* SSR = Solid state output (1 NO)

Features

Rated current

Function



10 Series - Light dependent relay for pole or wall mounting

- Sensitivity adjustment from 1 to 80 lux
- 1 or 2 contacts
- Italian Patent "light feedback compensation" innovative principle compatible with slow starting gas discharge lamps (up to 10 minutes)
- Protection category IP 54

12 A
16 A

Relays for automatic control of lighting according to the ambient light level



11 Series - Modular Light dependent relay

- Separate light sensor
- Nominal voltage 230 V AC, 24 V AC/DC
- Light dependent relay + time switch
- 2 setting range (1...80)lx/(20...1000)lx
- 1 or 2 contacts, 17.5 or 35 mm wide

12 A
16 A

Switching on and off of lights depending on the ambient light sensor by external



12 Series - Time switches

- Electromechanical or electronic version
- Programming with smartphone with NFC communication
- Power back-up
- Automatic adjustment for daylight saving
- 1 or 2 contacts, 17.5 or 35 mm wide

16 A

**Daily time switches
Weekly time switches
Digital "astro" switches**



14 Series - Modular electronic staircase timers

- Version with "Switch-off early warning"
- "Zero crossing" load switching
- Multi-functions or Mono-function
- Suitable for 3 or 4 wire systems
- 1 NO, 17.5 mm wide

16 A

Electronic staircase timers



15 Series - Dimmers

- "Soft" On and Off transitions
- Thermal protection against overload
- Compatible with LED lamps
- Suitable for incandescent and halogen lighting loads (with or without transformer or electronic supply)
- Version Master and Slave
- 35 mm rail (EN 60715) mount or panel mount or wall box

50 W
100 W
400 W
500 W

For control of lighting levels

Features	Rated current	Function
 <p>18 Series - PIR movement detectors</p> <ul style="list-style-type: none"> - Wall mounting, surface mounting or external installations (IP 54/IP 55) - Ambient light intervention threshold (5...350)lx - Light on time after last detection, 10 s...12 m - Small size 	10 A	Movement detectors
 <p>18 Series - PIR movement and presence detectors</p> <ul style="list-style-type: none"> - Wall mounting or ceiling mounting - External installations (IP 55) - Version Bluetooth, DALI and KNX - Ambient light intervention threshold (1...500)lx - Light on time after last detection, 12 s...35 m - Push-in terminals 	10 A	Movement and presence detectors

Features	Rated current	Function
 <p>13 Series - Electronic step and bistable relays</p> <ul style="list-style-type: none"> - Longer mechanical and electrical life, and much quieter than electromechanical step relays - Reset feature, for centralised OFF or ON command (Type 13.61) - Call/Reset relay - 35 mm rail (EN 60715) mount or panel mount or mounting within residential switch boxes 	8 A 10 A 12 A 16 A	Electronic step relays Call & Reset relays Electromechanical monostable relays
 <p>20 Series - Modular step relays</p> <ul style="list-style-type: none"> - Choice of 7 switching sequences - AC or DC coils - Test button with mechanical indicators - 1 or 2 contacts, 17.4 mm wide 	16 A	Step relays
 <p>26 Series - Step relays with electrically separate coil and contact circuits</p> <ul style="list-style-type: none"> - Panel mount or mounting within residential switch boxes - Choice of 6 switching sequences - AC coils - 1 or 2 contacts, electrically separate coil and contact circuits 	10 A	Step relays
 <p>27 Series - Step relay, for electrically common coil and contact circuits</p> <ul style="list-style-type: none"> - Panel mount or mounting within residential switch boxes - Choice of 3 switching sequences - AC coil with or without module for illuminated push buttons - 1 or 2 contacts, electrically common coil and contact circuits 	10 A	Step relays

Features

Rated current

Function



22 Series - Modular monostable relays

- AC or DC coils
- Test button
- 1 or 2 contacts, 17.5 mm wide

20 A Power interface



22 Series - Modular contactors

- AC/DC silent coil (with varistor protection)
- Mechanical and LED indicators as standard
- Auto-On-Off selector version available - (types 22.32, 22.34)
- 2 or 4 contacts
- Auxiliary contact module 6 A (accessory)
- 17.5, 35 or 53.5 mm wide

**25 A
40 A
63 A Power interface**

Features

Rated current



1C Series - Digital chronothermostats

- Touch screen
- Versatile in function and temperature levels
- Ultralim
- Supply 2 x 1.5 V AAA
- 1 change over 5 A/250 V AC

5 A



1T Series - Digital thermostats

- Supply 2 x 1.5 V AAA (electronic)
- Ultralim
- 1 change over 5 A/250 V AC

5 A

FINDER SpA
Via Drubiaglio 14
I-10040 ALMESE (TO)
Tel. +39 011 9346 211
Fax +39 011 9359 079
export@findernet.com



FINDER FRANCE Sarl
Avenue d'Italie
ZI du Pré de la Garde
F - 73300 ST. JEAN DE MAURIENNE
Tel. +33/479/83 27 27
Fax +33/479/59 80 04
finder.fr@finder.fr

S.P.R.L. FINDER BELGIUM B.V.B.A.
Bloemendael, 5
B - 1547 BEVER
Tel. +32/54/30 08 68
Fax +32/54/ 30 08 67
finder.be@findernet.com

FINDER P.L.C.
Opal Way - Stone Business Park
STONE, STAFFORDSHIRE
ST15 OSS - UK
Tel: +44 (0)1785 818100
Fax: +44 (0)1785 815500
finder.uk@findernet.com

FINDER AB
Sångelekgatan 6c
SE - 215 79 Malmö
Tel: +46 (0) 40 93 77 77
Fax: +46 (0) 40 93 78 78
finder.se@findernet.com

FINDER ApS
Bøstrupvej 11
DK-8870 Langå
Tel. +45 69 15 02 10
Fax +45 69 15 02 11
finder.dk@findernet.com

FINDER ELECTRICA S.L.U.
C/ Severo Ochoa, 6
Pol. Ind. Cap de L'Horta
E - 46185 La Pobla de Vallbona (VALENCIA)
Apdo Postal 234
Tel. +34-96 272 52 62
Fax +34-96 275 02 50
finder.es@findernet.com

FINDER PORTUGAL LDA
Travessa Campo da Telheira, n. 56
Vila Nova da Telha,
P - 4470-828 - MAIA
Tel. +351 22 99 42 900 -1-6-7-8
Fax +351 22 99 42 902
finder.pt@findernet.com

FINDER ECHIPAMENTE srl
Str. Clujului nr. 75 F,
401180 Turda
Jud. CLUJ - ROMANIA
Tel. +40 264 403 888
Fax +40 264 403 889
finder.ro@finder.ro

FINDER COMPONENTES LTDA.
Rua Olavo Bilac, 326
Bairro Santo Antônio
São Caetano Do Sul - São Paulo
CEP 09530 - 260 - BRASIL
Tel. +55 11 4223 1550
Tel. +55 11 2147 1550
Fax +55 11 4223 1590
finder.br@findernet.com

FINDER ARGENTINA
Calle Martín Lezica 3079
San Isidro - Buenos Aires
CP B1642GJA - ARGENTINA
Tel +54/11/5648.6576
Fax +54/11/5648.6577
finder.ar@findernet.com

FINDER Polska Sp. z o.o.
ul. Malwowa 126
PL - 60-175 Poznań
Tel. +48 61 865 94 07
Fax +48 61 865 94 26
finder.pl@findernet.com

FINDER GmbH
Hans-Böckler-Straße 44
D - 65468 Trebur-Astheim
Tel. +49 6147 2033-0
Fax +49 6147 2033-377
info@finder.de

FINDER RELAIS - NEDERLAND B.V.
Dukdalfweg 51
NL - 1041 BC Amsterdam
Tel. +31/20/615 65 57
Fax +31/20/617 89 92
finder.nl@findernet.com

FINDER RELAIS VERTRIEBS GmbH
IZ NÖ-Süd, Str. 2a, Obj. M 40
A - 2351 Wiener Neudorf
Tel. +43/2236/86 41 36 - 0
Fax +43/2236/86 41 36 - 36
finder.at@findernet.com

FINDER CZ, s.r.o.
Radiová 1567/2b
CZ - 102 00 PRAHA 10
Tel. +420 286 889 504
Fax +420 286 889 505
finder.cz@findernet.com

FINDER - Hungary Kereskedelmi Kft.
Kiss Ernő u. 3/A.
HU - 1046 BUDAPEST
Tel. +36/1-369-30-54
Fax +36/1-369-34-54
finder.hu@findernet.com

FINDER (Schweiz) AG
Industriestrasse 1a Postfach 23
CH - 8157 DIELSDORF (ZH)
Tel. +41 44 885 30 10
Fax +41 44 885 30 20
finder.ch@finder-relais.ch

FINDER RELAYS, INC.
4191 Capital View Drive
Suwanee, GA 30024 - U.S.A.
Tel. +1/770/271-4431
Fax +1/770/271-7530
finder.us@findernet.com

RELEVADORES FINDER, S.A. de C.V
Carretera a San Bernardino Chalchihuapan #43
San Pablo Ahuatempan, Santa Isabel Cholula, Puebla.
C.P. 74350 - MÉXICO.
Tel. +52/222/2832392, 2832393, 2832394
Fax. +52/222/7628471
finder.mx@findernet.com

FINDER OOO
Bakuninskaya street, 78
105082 MOSCOW
RUSSIAN FEDERATION
Tel. +7/495/229-49-29
Fax +7/495/229-49-4
finder.ru@findernet.com

FINDER ASIA Ltd.
Room 901 - 903, 9F, Premier
Center20 Cheung Shun Street
Cheung Sha Wan, Kowloon
Hong Kong
Tel. +852 3188 0212
Fax +852 3188 0263
finder.hk@findernet.com

FINDER INDIA PVT. LTD.
Unit No.912 - R.G. Trade Tower,
Netaji Subhash Place,
Wazirpur District Centre,
Pitampura - Delhi - 110034 - INDIA
Tel. +91-11-47564343
Fax +91-11-47564344
finder.in@findernet.com

FINDER reserves the right to alter characteristics at any time without notice. FINDER assumes no liability for damage to persons or property, caused as a result of the incorrect use or application of its products.

Rev. March 2017 - Product Profile - On-line updates

ZGUENXGRXX
II/17

