


- » AC input selectable by switch
- » High efficiency, high reliability
- » 100% full load and machine test
- » Protection characteristics: short circuit/overload
- » Air cooling
- » Working frequency 37 KHz
- » Size: 159 x 98 x 38mm



Isolated Output

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Tolerance: includes set up tolerance, line regulation and load regulation.

■ Connection Diagram

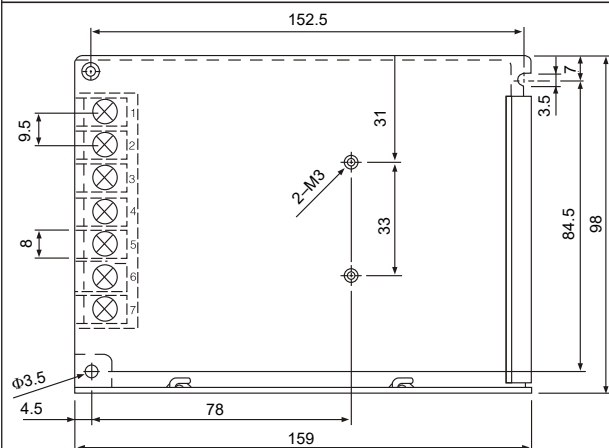

Terminal number	Terminal name	Terminal number	Terminal name
1	AC (L)	6	G1 (For +12V
2	AC (N)	7	+12VOUT
3		8	+12V-ADJ.
4	-12VOUT	9	LED
5	G2 (For -12V)		

