



BCH ELECTRIC LIMITED
we care for you

Soft starter- ASAB



ASAB-Series Soft starter

Soft start/stop static starters for three-phase asynchronous motors.

The ASAB is an advanced digital soft start solution for motors from 7 kW to 800 kW. ASAB soft starters provide a complete range of motor and system protection features and have been designed for reliable performance in the most demanding installation situations.

Technical features & Highlights

Extensive starting and stopping options

- AAC Adaptive Acceleration Control
- Constant current
- Current ramp
- Timed voltage ramp soft stop
- Brake

Models for all connection requirements

- 23 A to 1600 A (nominal)
- 200 VAC to 525 VAC
- 380 VAC to 690 VAC
- Internally bypassed up to 220 A
- In-line or inside delta connection (auto-detect)

Inputs and outputs

- Remote control inputs (3 x fixed, 1 x programmable)
- Relay outputs (3 x programmable)
- Analog output
- Device Net, Modbus or Profi bus communication modules (optional)

Easy-to-read display with comprehensive feedback

- Multi-language feedback
- Multiple status screens and performance graphs
- Date and time stamped event logging
- Operational counters (number of starts, hours run, kWh)
- Performance monitoring (current, voltage, power factor, kWh)
- User-programmable monitoring screen

Customizable protection

- Motor overload
- Excess start time
- Undercurrent
- Instantaneous over current
- Current imbalance

- Mains frequency
- Input trip
- Motor thermistor
- Power circuit
- Phase sequence

Soft Starter - Rating

Modello Model 200-525V	Size	Start per Hour	Bypassed ratings In-line connection				Start per Hour	Bypassed ratings Inside Delta connection			
			300%, 10s Light Dty	350%, 15s	400%, 20s	450%, 30s Hvy Dty		300%, 10s Light Dty	350%, 15s	400%, 20s	450%, 30s Hvy Dty
			N°	Amps	Amps	Amps		Amps	N°	Amps	Amps
ASAB-0023B/5/12/2	G1 no fan	10	23	20	17	15	10	35	30	26	22
ASAB-0043B/5/12/2	G1 no fan	10	43	37	31	26	10	65	59	51	44
ASAB-0053B/5/12/2	G1 no fan	10	53	53	46	37	10	80	80	69	55
ASAB-0076B/5/12/2	G1 no fan	6	76	64	55	47	6	114	96	83	70
ASAB-0097B/5/12/2	G1	6	97	82	69	58	6	146	123	104	87
ASAB-0100B/5/12/2	G1	6	100	88	74	61	6	150	132	112	92
ASAB-0105B/5/12/2	G1	6	105	105	95	78	6	158	158	143	117
ASAB-0145B/5/12/0	G2	6	145	123	106	90	6	218	184	159	136
ASAB-0170B/5/12/0	G2	6	170	145	121	97	6	255	217	181	146
ASAB-0200B/5/12/0	G2	6	200	189	160	134	6	300	283	241	200
ASAB-0220B/5/12/0	G2	6	220	210	178	148	6	330	315	268	223
Non Bypassed Ratings In-line connection						Non Bypassed ratings Inside delta connection					
ASAB-0255C/5/12/0	G3	6	255	231	201	176	6	383	346	302	264
ASAB-0380C/5/12/0	G4	6	380	380	359	299	6	570	570	539	449
ASAB-0430C/5/12/0	G4	6	430	430	368	309	6	645	645	552	464
ASAB-0620C/5/12/0	G4	6	620	620	540	434	6	930	930	810	651
ASAB-0650C/5/12/0	G4	6	650	650	561	455	6	975	975	842	683
ASAB-0790C/5/12/0	G4	6	790	790	714	579	6	1185	1185	1071	868
ASAB-0930C/5/12/0	G4	6	930	930	829	661	6	1395	1395	1244	992
ASAB-1200C/5/12/0	G5	6	1200	1200	1200	1071	6	1800	1800	1800	1606
ASAB-1410C/5/12/0	G5	6	1410	1410	1319	1114	6	2115	2115	1979	1671
ASAB-1600C/5/12/0	G5	6	1600	1600	1600	1353	6	2400	2400	2400	2030

Product selection chart

Bypass/Non Bypass
B = With Internal Bypass Contactor
C = Without Internal Bypass Contactor (Continuous)

Control Voltage
12 = 110-120Vac or 220-240Vac
14 = 24Vac/Vdc


ASAB XXXX B 7 12 2

Ratings - Amps
Current in Amps e.g. 0023

Mains Voltage
5 = 200-525Vac
7 = 380-690Vac


IP Rating
0 = IP00
2 = IP20

Inside Delta (6 wire connection possibility)

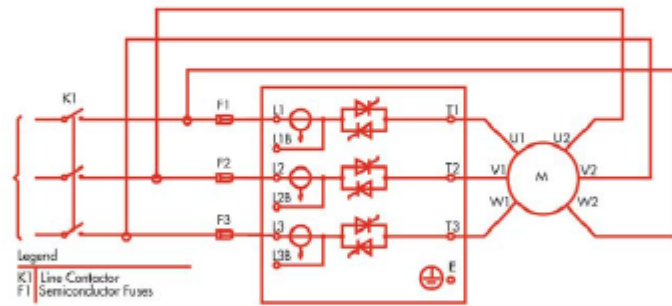

Dimensions and weight

Models	Dimensions WxHxD mm (inches)	Weight kg (lbs)
ASAB-0023B	150x295x183 (5.9"x11.6"x7.2")	4.3 (9.5)
ASAB-0043B	150x295x183 (5.9"x11.6"x7.2")	4.3 (9.5)
ASAB-0053B	150x295x183 (5.9"x11.6"x7.2")	4.3 (9.5)
ASAB-0076B	150x295x183 (5.9"x11.6"x7.2")	4.5 (9.9)
ASAB-0097B	150x295x213 (5.9"x11.6"x8.4")	5.0 (11.0)
ASAB-0100B	150x295x213 (5.9"x11.6"x8.4")	5.0 (11.0)
ASAB-0105B	150x295x213 (5.9"x11.6"x8.4")	5.0 (11.0)
ASAB-0145B	275x438x250 (10.8"x17.2"x9.9")	15 (33.0)
ASAB-0170B	275x438x250 (10.8"x17.2"x9.9")	15 (33.0)
ASAB-0200B	275x438x250 (10.8"x17.2"x9.9")	15 (33.0)
ASAB-0220B	275x438x250 (10.8"x17.2"x9.9")	15 (33.0)
ASAB-0255B	424x440x392 (16.7"x17.3"x15.4")	26 (57.2)
ASAB-0350B	424x440x392 (16.7"x17.3"x15.4")	30.2 (66.6)
ASAB-0425B	424x440x392 (16.7"x17.3"x15.4")	30.2 (66.6)
ASAB-0500B	433x640x600 (17.0"x25.2"x23.6")	49.5 (109.1)
ASAB-0580B	433x640x600 (17.0"x25.2"x23.6")	49.5 (109.1)
ASAB-0700B	433x640x600 (17.0"x25.2"x23.6")	60 (132.3)
ASAB-0820B	433x640x600 (17.0"x25.2"x23.6")	60 (132.3)
ASAB-0920B	433x640x600 (17.0"x25.2"x23.6")	60 (132.3)
ASAB-1000B	433x640x600 (17.0"x25.2"x23.6")	60 (132.3)
ASAB-0255C	390x460x280 (15.4"x18.1"x11.0")	24 (52.9)
ASAB-0380C	430x689x300 (16.9"x27.1"x11.8")	45 (98.1)
ASAB-0430C	430x689x300 (16.9"x27.1"x11.8")	45 (98.1)
ASAB-0620C	430x689x300 (16.9"x27.1"x11.8")	45 (98.1)
ASAB-0650C	430x689x300 (16.9"x27.1"x11.8")	45 (98.1)
ASAB-0790C	430x689x300 (16.9"x27.1"x11.8")	45 (98.1)
ASAB-0930C	430x689x300 (16.9"x27.1"x11.8")	53 (116.8)
ASAB-1200C	585x856x364 (23.0"x33.7"x14.3")	117 (257.9)
ASAB-1410C	585x856x364 (23.0"x33.7"x14.3")	117 (257.9)
ASAB-1600C	585x856x364 (23.0"x33.7"x14.3")	130 (286.6)



BCH ELECTRIC LIMITED

Visit us at : www.bchindia.com

Corporate Office : 1105, New Delhi House, 27, Barakhamba Road, New Delhi - 110 001 Tel. : 91-11-23316029/3610/6539 Fax : 91-11-23715249 E-Mail : marketing@bchindia.com
Registered Office : Block 1E, 216, Acharya Jagadish Chandra Bose Road, Kolkata - 700 017
Works : 20/4, Mathura Road, Faridabad - 121 006 (Haryana) Tel. : 0129-4063000/4061026 Fax : 0129-2304024

Sales Offices :

Ahmedabad
93, City Centre,
Near Swastik Char Rasta,
C.C.Road, Navrangpura,
Ahmedabad - 380 009
Tel.: (079) 26565719, 26565728
Mobile: 98256-07601
Fax : (079) 26561210
E-mail : ahmedabad@bchindia.com

Bangalore
B.M.H. Complex, 1st Floor,
No. 22, Kengal Hanumanthiah Road,
Bangalore - 560 027
Tel.: 080-22273478, 41144878, 41144879
Mobile: 98455-46105
Fax : 080-22236759
E-mail : bangalore@bchindia.com

Bhubaneswar
Plot No. 4708/1,
Gajapati Nagar,
Bhubaneswar - 750 005
Tel.: 0674-2301767
Mobile: 98610-81767
E-mail : bhubaneswar@bchindia.com

Chandigarh
SCO 121-22-23, 1st Floor,
Sector 34-A, Chandigarh - 160 022
Tel.: 0172-6079357
Mobile: 98554-87089
E-mail : chandigarh@bchindia.com

Chennai
LVR CENTRE, 3rd Floor
No. 7, Seshadri Road,
Amarpet, Chennai - 600 018
Tel.: 044-2497042, 24997002
Mobile: 98402-85500
Fax : 044-24996853
E-mail : chennai@bchindia.com

Cochin
2nd Floor, 32/1495
B-1, Chakos Chambers,
By Pass Junction,
Cochin - 682 025
Tel.: 0484-6593697
Mobile: 98477-43393
E-mail : cochin@bchindia.com

Coimbatore
87, Dr. Nanjappa Road,
Coimbatore - 641 018
Tel.: 0422-2305311
Mobile: 98430-53555
Fax : 0422-2302599
E-mail : coimbatore@bchindia.com

Faridabad
110 & 117, Om Shubham Tower
Nearlam Bata Road, N.L.T.
Faridabad - 121 001 (Haryana)
Mobile: 98180-10700
E-mail : faridabad@bchindia.com

Gurgaon
SF-203, Navkriti Arcade
Block-A, Sushant Lok, Phase-II
Gurgaon - 122 001 (Haryana)
Mobile: 99101-55464
E-mail : gurgaon@bchindia.com

Guwahati
2nd Floor, Maya Ville,
Borthakur Mill Road, Ulubari
Guwahati - 781 007
Mobile: 09435407024
E-mail : guwahati@bchindia.com

Hospat
940C, Third Cross
Third Ward, Patel Nagar
Station Road,
Hospet-583201
Tel.: 09845930782
E-mail : hospet@bchindia.com

Hubli
A-5, Navaniketan Apartments
Ashok Nagar
Hubli (Karnataka)
Tel.: 0836-3090472
Mobile No.: 98502-90471
E-mail : hubli@bchindia.com

Hyderabad
210, Prajey Corporate House,
1-10-63864, Chikoti Garden,
Begumpet, Hyderabad - 500 016
Tel.: 040-66206263/27763325
Mobile: 98493-99240
Fax : 040-66207273
E-mail : hyderabad@bchindia.com

Indore
330-331, Indraprastha Tower,
6, MG Road, Indore - 452 001
Tel.: 0731-2510011
Mobile: 98266-66091
E-mail : indore@bchindia.com

Jaipur
25, Hathroi, Gopalbari,
Jaipur - 302 001
Tel.: 0141-5104521
Mobile: 98290-10813
Fax : 0141-2363521
E-mail : jaipur@bchindia.com

Jamshedpur
3rd Floor, Aastha Trade Centre,
'Q' Road, Bistapur,
Jamshedpur - 831001
Tel.: 0657-6573507
Mobile: 98351-82109
Fax : 0657-2420439
E-mail : jamshedpur@bchindia.com

Kolkata
East India House,
3rd Floor, 20-B, Abdul Hamid
Street, Kolkata - 700 069
Tel.: 033-22138508 / 10
Mobile: 98303-36101
Fax : 033-22138512
E-mail : kolkata@bchindia.com

Lucknow
Madan Plaza, 3rd Floor,
14, Station Road, Lucknow
Tel.: 0522-4025597/402597/4025697
Mobile: 98399-12304
E-mail : lucknow@bchindia.com

Ludhiana
S.C.O - 18, 1st Floor,
Feroze Gandhi Market,
Ludhiana - 140 001
Tel.: 0161-5021807
Mobile: 98765-87088
Fax : 0161-2771807
E-mail : ludhiana@bchindia.com

Madurai
E 168/69, Santanam Road
TVS Nagar
Madurai-625003
Tel.: 09843133990
E-mail : madurai@bchindia.com

Mumbai
A-151, Mittal Tower,
Nariman Point,
Mumbai - 400 021
Tel.: 022-22822947/22826039
Mobile: 98923-00706
Fax : 022-22822858
E-mail : mumbai@bchindia.com

Nagpur
Block No. 238-B,
Opp. Dharamdas Darbar,
Nr. Choudhary Chowk, Jaripatka,
Nagpur, Maharashtra - 440 014
Mobile: 99701-80877
E-mail : nagpur@bchindia.com

New Delhi
801, Akash Deep,
26A, Barakhamba Road,
New Delhi - 110 001
Tel.: 011-23313878
Mobile: 98102-12502
Fax : 011-23739230
E-mail : delhi@bchindia.com

Pune
8, Sarosh Bhawan,
16-B/1, Dr. Ambedkar Road,
Pune - 411 001
Tel.: 020-26052590
Mobile: 98220-11086
Fax : 020-26135224
E-mail : pune@bchindia.com

Raipur
2nd Floor,
Building No-B-234,
Indira Gandhi
Vyvasayik Parisar,
Pandri, Raipur - 492 004
Tel.: 0771-4020213
Mobile: 98266-66092
E-mail : raipur@bchindia.com

Surat
601/A, 21st Century Business Centre
Ring Road
Surat - 395 002
Mobile: 91 9825607617
E-mail : surat@bchindia.com

Trichy
Kingston Park,
Second Floor,
19/1, Pultar High Road,
Ramalinga Nagar,
Trichy - 620 003.
Mobile: 99406 76502
E-mail : trichy@bchindia.com

Vadodara
101, Toran Complex,
Vikas Nagar
Old Padra Road
Vadodara - 390 020.
Tel.: 0265-6548444
E-mail : baroda@bchindia.com

Vishakapatnam
Venu Valbhavam, 2nd Floor,
Flat No. 201, Palace
Layout, Pedda Waltair,
Vishakapatnam - 530 017
Mobile: 98493-99238
E-mail : vizag@bchindia.com

Western UP & Uttarakhand
8, Cooperative Industrial Estate
Patel Nagar
Dehradun - 248001
Uttarakhand
Mobile: 9760005793
E-mail : dehradun@bchindia.com

Resident Engineers Locations Tel.

Agartala	94361-28939	Kolhapur	98906-26205	Kota	98290-14899	Mangalore	98457-31944	Tirupathi	98661-30930
Haldwani	99970-12643	Nashik	98900-12944	Navli Mumbai	98923-00701	Pondichery	98942-22033	Warangal	98495-51691
Kanpur	98392-34539	Salem	98433-19533	Silchar	94354-04033	Siliguri	98320-11433		
Muzaffarnagar	98970-73741	Udaipur	98292-44085	Vijayawada	98662-20504	Bhilai	98266-12907		
Renukoot	98399-55117	Bhopal	98266-66093	Baddi	93187-78975	Gwalior	98268-03658		
Ambala	93541-18839	Ghaziabad	98107-44937	Gorakhpur	98392-24988	Jodhpur	98292-18618		
Durgapur	97320-03364	Jabalpur	98268-03656	Jalandhar	98763-47188	Rajkot	98256-04709		

Since product improvement is a continuous process, the data furnished in this brochure may undergo revision without prior notice.